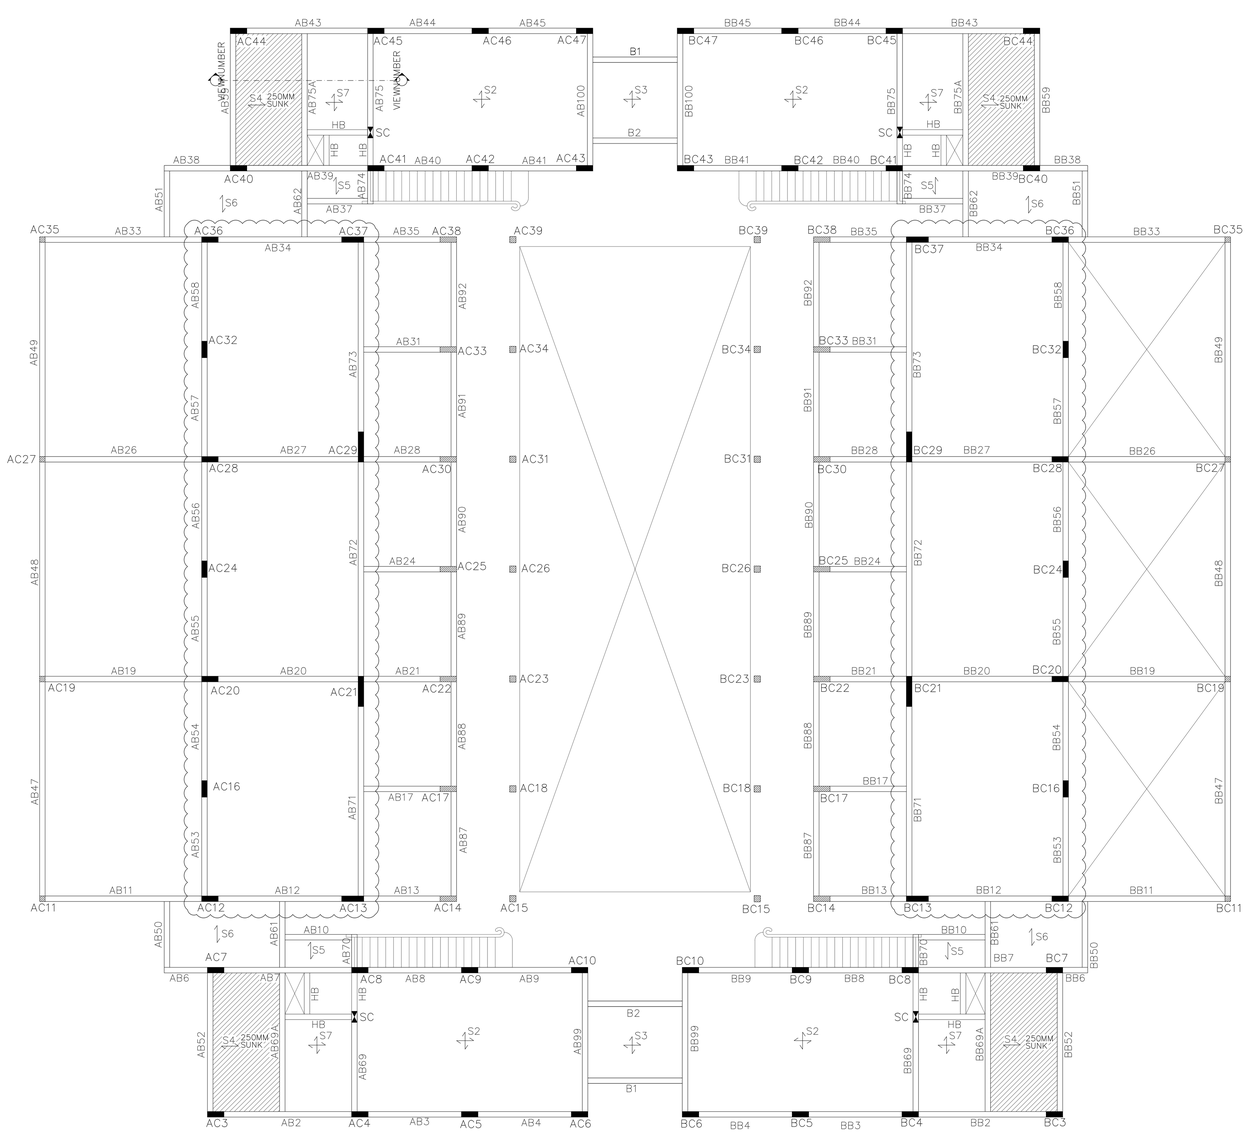

FIRST FLOOR LEVEL

DETAIL OF SC
SIZE :– 200 x 400
STEEL:– 6NOS–T12
LINKS:– T8@150c/c
SC COL. FROM GROUND FLOOR LVL. TO 1ST FLOOR LVL.



SECTION 'X – X'

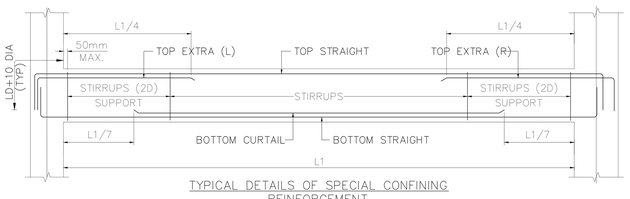

TYPICAL DETAILS OF SPECIAL CONFINING REINFORCEMENT FOR BEAM RESTING ON COLUMN AT BOTH ENDS

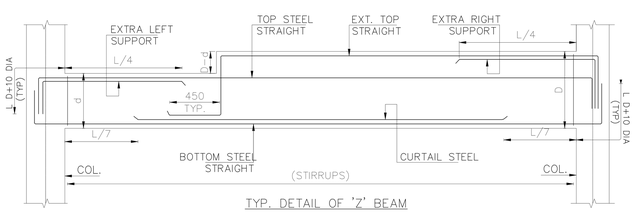

TYP. DETAIL OF 'Z' BEAM

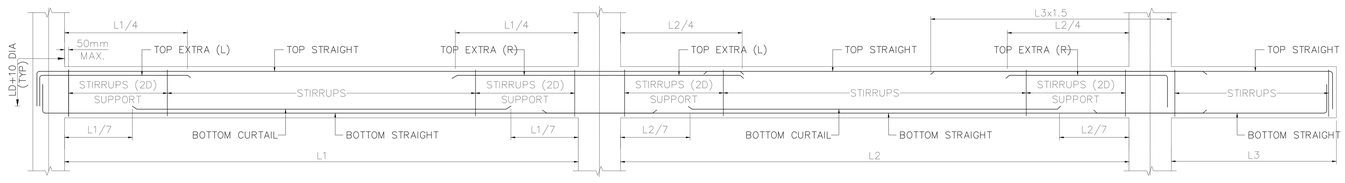

TYPICAL DETAILS OF SPECIAL CONFINING REINFORCEMENT REQUIREMENT FOR BEAM REINFORCEMENT

SCHEDULE OF 'Z' BEAMS AT 1ST FLOOR LEVEL

BEAM MARKED	SIZE (B x D)	REINFORCEMENT						STIRRUPS		REMARKS
		BOTTOM (STRAIGHT)	BOTTOM (CURTAIL)	TOP (STRAIGHT)	EX. TOP (STRAIGHT)	TOP (EXTRA OVER SUPPORT) LEFT	TOP (EXTRA OVER SUPPORT) RIGHT	UPTO L/4	REST	
AB11,33 BB11,33	200 x 600 ~1200	2 – T16	---	2 – T16	2 – T16	---	---	T8@100 C/C	T8@100C/C	SFR 3–T10

SCHEDULE OF BEAMS AT 1ST FLOOR LEVEL :– BEAM AB3,4,5,14,15,16,18,22,23,25,29,30,32,36,42,60,62A,63,64,65,66,67,68,84,85,86,93,94,95,96,HB & HB1 ARE DELETED

BEAM MARKED	SIZE (B x D)	REINFORCEMENT					STIRRUPS		REMARKS
		BOTTOM (STRAIGHT)	BOTTOM (CURTAIL)	TOP (STRAIGHT)	TOP (EXTRA OVER SUPPORT) LEFT	TOP (EXTRA OVER SUPPORT) RIGHT	UPTO L/4	REST	
B1,2	200 x 600	2 – T16 +2 – T12	---	2 – T12	---	---	T8@200C/C	T8@200C/C	– – –
AB2,43	200 x 600	3 – T16	2 – T12	2 – T12	3 – T16	3 – T16	T8@100 C/C	T8@200 C/C	– – –
AB3,4,8,9,40,41,44,45	200 x 600	2 – T16 +2 – T12	---	2 – T12	2 – T16	2 – T16	T8@200 C/C	T8@200 C/C	– – –
AB6	200 x 600	2 – T12	---	2 – T16 +2 – T12	---	---	T10@100 C/C	T10@100 C/C	CANTILEVER
AB7	200 x 600	2 – T16	2 – T16	2 – T16	3 – T16	3 – T16	T8@100 C/C	T8@150 C/C	TOP & BOTT.BARS TO BE TAKEN FROM CANTILEVER
AB10,37,50,51,61,62	200 x 600	2 – T16	---	2 – T12	---	---	T8@150C/C	T8@200C/C	– – –
AB12,34	200 x 600	2 – T16 +2 – T12	2 – T16	2 – T16	2 – T16	2 – T16	T8@100 C/C	T8@150C/C	– – –
AB13,35	200 x 600	2 – T16 +2 – T16	---	2 – T16	2 – T16	2 – T16	T8@100C/C	T8@100C/C	– – –
AB20,27	200 x 600	3 – T16 +2 – T12	2 – T16	2 – T16	---	---	T8@200 C/C	T8@200 C/C	– – –
AB17,24,31	200 x 600	2 – T16	---	2 – T16	---	2 – T16	T8@100 C/C	T8@100 C/C	– – –
AB19,26	200 x 600	3 – T16 +2 – T12	3– T16	2 – T16 +2 – T12	2 – T12	3– T16	T10@100 C/C	T10@150 C/C	– – –
AB21,28	200 x 600	3– T16	---	2 – T16	---	---	T8@200C/C	T8@200C/C	– – –
AB38	200 x 600	2 – T16	---	2 – T16 +2 – T16	---	---	T10@100C/C	T10@100C/C	CANTILEVER
AB39	200 x 600	3– T16	2 – T12	2 – T16	---	2 – T16	T8@100C/C	T8@100C/C	TOP & BOTT.BARS TO BE TAKEN FROM CANTILEVER
AB47,48,49	200 x 600	3 – T16 +2 – T16	2 – T16	2 – T16 +2 – T12	3– T16	3– T16	T10@100C/C	T10@150C/C	– – –
AB52,59,99,100	200 x 600	3 – T16	2 – T12	2 – T16	2 – T16	2 – T16	T10@150C/C	T10@200C/C	– – –
AB69,75	200 x 400	3 – T16	2 – T16	2 – T16	2 – T16	2 – T16	T10@100C/C	T10@150C/C	– – –
AB53,54,55,56,57,58 87,88,89,90,91,92	200 x 600	2 – T16 +2 – T12	---	2 – T16	---	---	T8@100C/C	T8@200C/C	– – –
AB62A,84,85,86	200 x 350	2 – T12	---	2 – T12	---	---	T8@150C/C	T8@150C/C	BEAM TOP @250 SUNK LVL
AB67	200 x 600	2 – T12	---	2 – T12	---	---	T8@150 C/C	T8@150 C/C	
AB69A,75A	200 x 375	2 – T16 +2 – T16	---	2 – T16 +2 – T12	---	---	T8@100C/C	T8@100C/C	– – –
AB70	200 x 600	2 – T16	---	2 – T16 +2 – T12	---	---	T8@100C/C	T8@100C/C	CANTILEVER
AB71,72,73	200 x 600	3 – T16	3– T16	2 – T16 +2 – T12	3 – T16	3 – T16	T10@100C/C	T10@125C/C	– – –
AB74	200 x 600	2 – T16	---	2 – T16	---	---	T8@100 C/C	T8@100 C/C	– – –
AB78,79,81	200 x 600	2 – T12	---	2 – T10	---	---	T8@150 C/C	T8@150 C/C	– – –
HB	200 x SLAB THK.	2 – T12	---	2 – T12	---	---	T8@150C/C	T8@150C/C	HIDDEN BEAM

SCHEDULE OF BEAMS AT 1ST FLOOR LEVEL :– BEAM BB3,4,5,14,15,16,18,22,23,25,29,30,32,36,42,60,62A,63,64,65,66,67,68,84,85,86,93,94,95,96,HB & HB1 ARE DELETED

BEAM MARKED	SIZE (B x D)	REINFORCEMENT					STIRRUPS		REMARKS
		BOTTOM (STRAIGHT)	BOTTOM (CURTAIL)	TOP (STRAIGHT)	TOP (EXTRA OVER SUPPORT) LEFT	TOP (EXTRA OVER SUPPORT) RIGHT	UPTO L/4	REST	
BB2,43	200 x 600	3 – T16	2 – T12	2 – T12	3 – T16	3 – T16	T8@100 C/C	T8@200 C/C	– – –
BB3,4,8,9,40,41,44,45	200 x 600	2 – T16 +2 – T12	---	2 – T12	2 – T16	2 – T16	T8@200 C/C	T8@200 C/C	– – –
BB6	200 x 600	2 – T12	---	2 – T16 +2 – T12	---	---	T10@100 C/C	T10@100 C/C	CANTILEVER
BB7	200 x 600	2 – T16	2 – T16	2 – T16	3 – T16	3 – T16	T8@100 C/C	T8@150 C/C	TOP & BOTT.BARS TO BE TAKEN FROM CANTILEVER
BB10,37,50,51,61,62	200 x 600	2 – T16	---	2 – T12	---	---	T8@150C/C	T8@200C/C	– – –
BB12,34	200 x 600	2 – T16 +2 – T12	2 – T16	2 – T16	2 – T16	2 – T16	T8@100 C/C	T8@150C/C	– – –
BB13,35	200 x 600	2 – T16 +2 – T16	---	2 – T16	2 – T16	2 – T16	T8@100C/C	T8@100C/C	– – –
BB20,27	200 x 600	3 – T16 +2 – T12	2 – T16	2 – T16	---	---	T8@200 C/C	T8@200 C/C	– – –
BB17,24,31	200 x 600	2 – T16	---	2 – T16	---	2 – T16	T8@100 C/C	T8@100 C/C	– – –
BB19,26	200 x 600	3 – T16 +2 – T12	3– T16	2 – T16 +2 – T12	2 – T12	3– T16	T10@100 C/C	T10@150 C/C	– – –
BB21,28	200 x 600	3– T16	---	2 – T16	---	---	T8@200C/C	T8@200C/C	– – –
BB38	200 x 600	2 – T16	---	2 – T16 +2 – T16	---	---	T10@100C/C	T10@100C/C	CANTILEVER
BB39	200 x 600	3– T16	2 – T12	2 – T16	---	2 – T16	T8@100C/C	T8@100C/C	TOP & BOTT.BARS TO BE TAKEN FROM CANTILEVER
BB47,48,49	200 x 600	3 – T16 +2 – T16	2 – T16	2 – T16 +2 – T12	3– T16	3– T16	T10@100C/C	T10@150C/C	– – –
BB52,59,99,100	200 x 600	3 – T16	2 – T12	2 – T16	2 – T16	2 – T16	T10@150C/C	T10@200C/C	– – –
BB69,75	200 x 400	3 – T16	2 – T16	2 – T16	2 – T16	2 – T16	T10@100C/C	T10@150C/C	– – –
BB53,54,55,56,57,58 87,88,89,90,91,92	200 x 600	2 – T16 +2 – T12	---	2 – T16	---	---	T8@100C/C	T8@200C/C	– – –
BB62A,84,85,86	200 x 350	2 – T12	---	2 – T12	---	---	T8@150C/C	T8@150C/C	BEAM TOP @250 SUNK LVL
BB67	200 x 600	2 – T12	---	2 – T12	---	---	T8@150 C/C	T8@150 C/C	
BB69A,75A	200 x 375	2 – T16 +2 – T16	---	2 – T16 +2 – T12	---	---	T8@100C/C	T8@100C/C	– – –
BB70	200 x 600	2 – T16	---	2 – T16 +2 – T12	---	---	T8@100C/C	T8@100C/C	CANTILEVER
BB71,72,73	200 x 600	3 – T16	3– T16	2 – T16 +2 – T12	3 – T16	3 – T16	T10@100C/C	T10@125C/C	– – –
BB74	200 x 600	2 – T16	---	2 – T16	---	---	T8@100 C/C	T8@100 C/C	– – –
BB78,79,81	200 x 600	2 – T12	---	2 – T10	---	---	T8@150 C/C	T8@150 C/C	– – –
HB	200 x SLAB THK.	2 – T12	---	2 – T12	---	---	T8@150C/C	T8@150C/C	HIDDEN BEAM

SCHEDULE OF SLABS AT 1ST FLOOR LEVEL:– SLAB S1 ARE DELETED

SLAB MARKED	THICK.	TYPE	REINFORCEMENT		REMARKS
			SHORT BAR	LONG BAR	
S2	175	TWO WAY	T10@100C/C (ALT. BENT UP)	T10@200C/C (ALT. BENT UP)	–
S3	125	TWO WAY	T8@150C/C (ALT. BENT UP)	T8@200C/C (ALT. BENT UP)	–
S4	125	ONE WAY	T8@100C/C (ALT. BENT UP)	T8@200C/C (ALT. BENT UP)	250MM SUNK SLAB
S5	115	ONE WAY	T8@150C/C (ALT. BENT UP)	T8@200C/C (ALT. BENT UP)	–
S6	115	ONE WAY	T8@150C/C (ALL STRAIGHT)	T8@200C/C (DIST.)	–
S7	175	TWO WAY	T10@150C/C (ALT. BENT UP)	T10@200C/C (ALT. BENT UP)	–
ST	225	ONE WAY	T12@100C/C (MAIN)	T12@200C/C (DIST.)	STAIRCASE SLAB

This drawing is the property of Associated Structural Engineers LLP. and shall not be reproduced or used without writ

DRAWING NOS. – ASC – 04

PROJECT STAGE :
☐– SUB ☐– TENDER ☐– ADVANCE ☑– EXECUTION

SIGN CONVENTIONS
FOR BEAM LEFT & RIGHT SIDES
FOR STIRRUPS & EXTRA TOP BARS

SPECIAL NOTES :–
ALL EXTERNAL WALLS SHALL BE 150 thk. LIGHT WEIGHT BLOCK
ALL INTERNAL WALLS SHALL BE 150 thk. LIGHT WEIGHT BLOCKS

NOTES :
1. Basic reference code:– IS 456: 2000, IS 1893, IS 1393
2. Due care shall be taken to ascertain that requisite stren gained before commencement of deshuttering. It shall comply Clause No. 11.3 of IS 456: 2000.
3. Earthquake zone considered is zone III for MUMBAI region
4. Clear covers
   a) Footings / Raft (Bottom / Top)
   b) Columns & walls >200mm width
   c) Columns & walls having width of 200mm & below
   d) Slabs
   e) Beams
   f) Girder Beams
   g) Pile cap
5. Beams having depth more than 750mm, provide side–fa
6. Substratum shall be approved from our office before layi
7. Minimum clear spacing between any two longitudinal bars 50mm.
8. All laps(Ld) shall be staggered & not more than 50% bars to at any given section. Ld = 50 X D (where D= dia. o
9. All buildings shall have tie beams/plinth beams at groun
10. At any level where column size gets reduced in either dim beams/plinth beams are essential.
11. For cantilevers, top bars to be anchored behind from exte support for –1.5 X span of cantilever.
12. Fire rating considered:– 2 Hour Max.

Use of this drawing for construction shall explicitly confirm acce following conditions by Owner / Builder / Contractor
1. Our responsibility shall remain limited to safe and sound as transmitted by this drawing and we shall not remain res
   a) Safety of old structure during demolition.
   b) Safety of any adjoining building /persons staying building/persons and properties on adjoining roads.
   c) Safety of construction worker/any personnel at wor construction
   d) Correctness/safety of any temporary structure, sca centering erected at site and any injury to any personnel any accidents.
   e) Accidents occurring due to premature deshuttering, substandard construction material or workmanship / faulty procedure.
   f) Any accident occurring due to construction of elen designed by us.
2. Supervision if specifically asked for will be provided to th verification of reinforcement on site
3. All structural concrete should be weigh batched, machine mechanically vibrated
4. Any discrepancy between our drawing & Architects' drawi brought to our notice before construction.
5. Drawing shall not be scaled written dimensions are to be
6. This drawing to be read along with other relevant drawin

REV.	DESCRIPTION	DATE	DWN.	CHKD.
R9	REVISED AS MARKED	15.12.23	NK	SIDDHI
R8	REVISED AS MARKED	30.11.23	NK	SIDDHI
R7	REVISED AS PER COMMENTS & AS MARKED	23.11.23	NK	SIDDHI
R6	REVISED AS PER COMMENTS & AS MARKED	13.11.23	NK	SIDDHI
R5	REVISED AS PER COMMENTS & AS MARKED	12.10.23	NK	SIDDHI
R4	REVISED AS PER COMMENTS & AS MARKED	10.10.23	NK	SIDDHI
R3	REVISED AS PER COMMENTS & AS MARKED	10.10.23	NK	SIDDHI
R2	REVISED AS PER COMMENTS	27.09.23	NK	SIDDHI
R1	REVISED AS PER COMMENTS	21.09.23	NK	SIDDHI

GRADE OF CONCRETE :–	– M25
GRADE OF STEEL :–	– Fe500
ENVIRONMENTAL EXPOSURE CONDITION :–	– MODERATE
DESIGN LIVE LOAD :– (UNLESS SPECIFIED)	–
S.B.C. :–	

PROJECT : PROPOSED RESORT @ PALI, RAIGARH
(GUEST BLOCK – 1A & 1B)

CLIENT :	MELLORA INFRASTRUCTURE
ARCHITECT :	STUDIO HUMANE
DRAWING TITLE :	RCC DETAIL OF 1ST FLOOR LEVEL

SCALE	DWN.BY	CHK.BY	DATE	JOB NO.
N.T.S.	NandkumaR	SIDDHI	18.09.2023	ASC–2544

Associated Structural Engineers LLP.
607, Opal Square, Opp. Railadevi Lake, Barve Rd.
Wagale Estate,
Thane (w)– 400 604.
Phone: +91–22–20812084/85, 8976072223
Email: info@asc.org.in Website: www.asc.org.in