
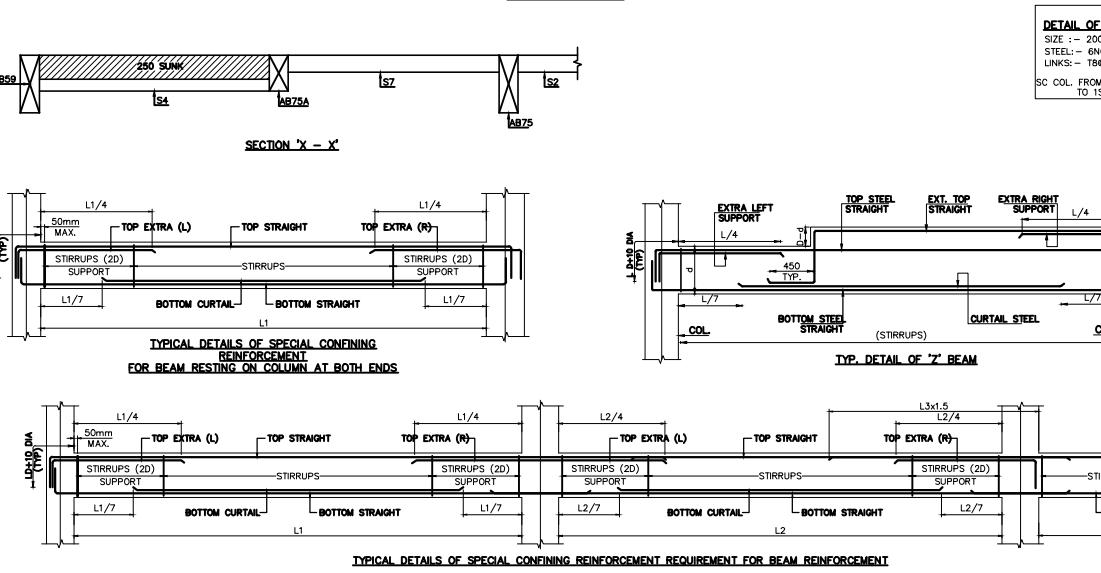


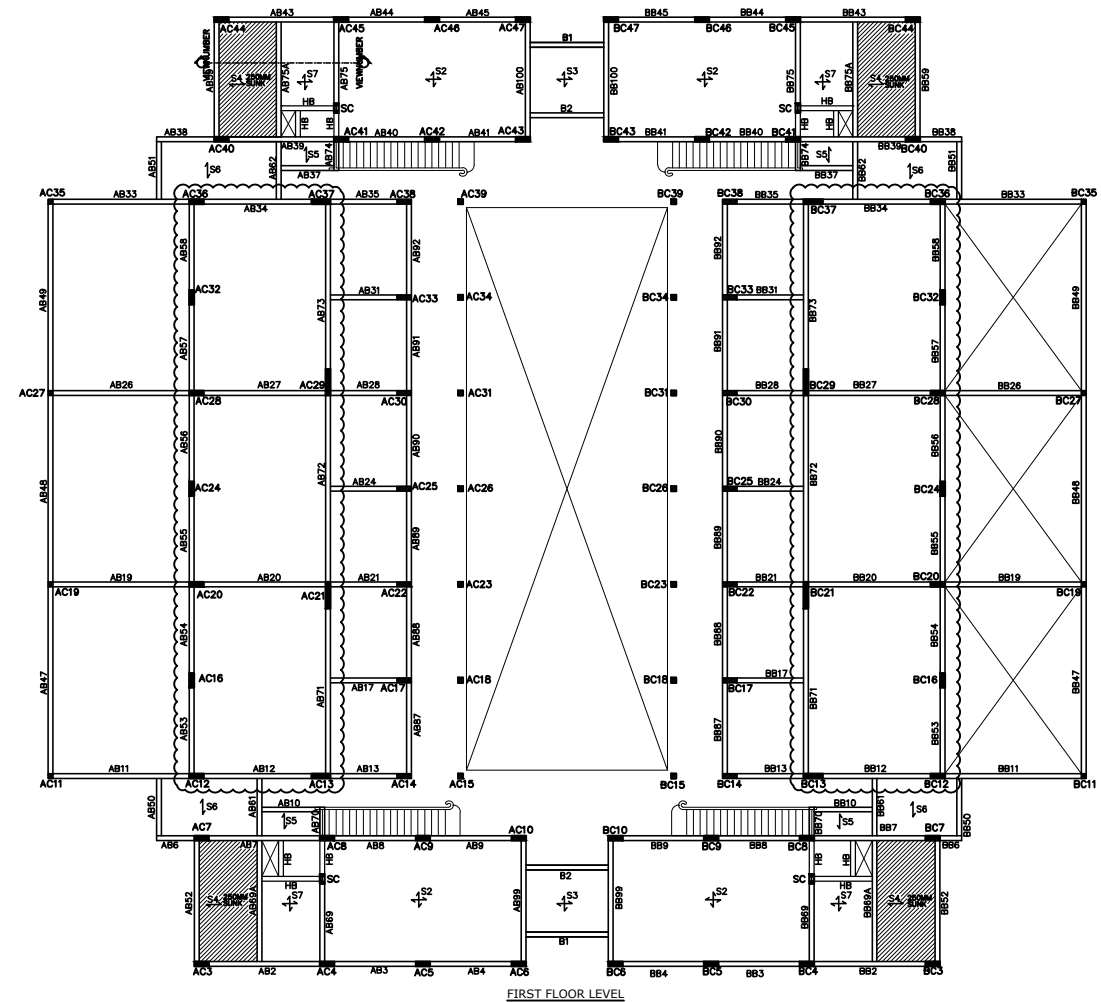

SCHEDULE OF 'Z' BEAMS AT 1ST FLOOR LEVEL									
BEAM MARKED	SIZE (B x D)	BOTTOM (STRAIGHT)	BOTTOM (CURTAIL)	TOP (STRAIGHT)	EX. TOP (STRAIGHT)	EXTRA LEFT	EXTRA RIGHT	STIRRUPS	REMARKS
AB11,33 BB11,33	200 x 600 200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	2 - T16 2 - T16	---	---	T8@100 C/C T8@100 C/C	SFR 3-T10

SCHEDULE OF BEAMS AT 1ST FLOOR LEVEL :- BEAM AB3,4,5,14,15,16,18,22,23,25,29,30,32,36,42,60,62A,63,64,65,66,67,68,84,85,86,93,94,95,96,HB & HB1 ARE DELETED.

BEAM MARKED	SIZE (B x D)	BOTTOM (STRAIGHT)	BOTTOM (CURTAIL)	TOP (STRAIGHT)	EXTRA LEFT	EXTRA RIGHT	STIRRUPS	REMARKS
B1,2	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T8@200/C T8@200/C	---
AB2,4,3	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T8@200/C T8@200/C	---
AB3,4,8,9,40,41,44	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T8@200 C/C T8@200 C/C	---
AB6	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T10@100 C/C T10@100 C/C	CANTILEVER
AB7	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T8@100 C/C T8@100 C/C	TOP & BOTTOM BARS TO BE TAKEN FROM CANTILEVER
AB10,37,50,51,61,62	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T8@150C/C T8@200C/C	---
AB12,34	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T8@100 C/C T8@150C/C	---
AB13,35	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T8@100C/C T8@100C/C	---
AB20,27	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T8@200 C/C T8@200 C/C	---
AB17,24,31	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T8@100 C/C T8@100 C/C	---
AB19,26	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T10@100 C/C T10@150 C/C	---
AB21,28	200 x 600	3 - T16 3 - T16	---	2 - T16 2 - T16	---	---	T8@200C/C T8@200C/C	---
AB38	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T10@100C/C T10@100C/C	CANTILEVER
AB39	200 x 600	3 - T16 3 - T16	---	2 - T16 2 - T16	---	---	T8@100C/C T8@100C/C	TOP & BOTTOM BARS TO BE TAKEN FROM CANTILEVER
AB47,48,49	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T10@100C/C T10@150C/C	---
AB52,59,99,100	200 x 600	3 - T16 3 - T16	---	2 - T16 2 - T16	---	---	T10@150C/C T10@200C/C	---
AB69,75	200 x 400	3 - T16 3 - T16	---	2 - T16 2 - T16	---	---	T10@100C/C T10@150C/C	---
AB53,54,55,56,57,58,59,90,91,92	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T8@100C/C T8@200C/C	---
AB62A,84,85,86	200 x 350	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T8@150C/C T8@150C/C	BEAM TOP @250 SUNK LVL
AB67	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T8@150 C/C T8@150 C/C	---
AB69A,75A	200 x 375	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T8@100C/C T8@100C/C	---
AB70	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T8@100C/C T8@100C/C	CANTILEVER
AB71,72,73	200 x 600	3 - T16 3 - T16	---	3 - T16 3 - T16	---	---	T10@100C/C T10@125C/C	---
AB74	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T8@100 C/C T8@100 C/C	---
AB78,79,81	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T8@150 C/C T8@150 C/C	---
HB	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T8@150C/C T8@150C/C	HIDDEN BEAM


SCHEDULE OF BEAMS AT 1ST FLOOR LEVEL :- BEAM BB3,4,5,14,15,16,18,22,23,25,29,30,32,36,42,60,62A,63,64,65,66,67,68,84,85,86,93,94,95,96,HB & HB1 ARE DELETED.

BEAM MARKED	SIZE (B x D)	BOTTOM (STRAIGHT)	BOTTOM (CURTAIL)	TOP (STRAIGHT)	EXTRA LEFT	EXTRA RIGHT	STIRRUPS	REMARKS
BB2,4,3	200 x 600	3 - T16 3 - T16	---	2 - T16 2 - T16	---	---	T8@100 C/C T8@200 C/C	---
BB3,4,8,9,40,41,44	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T8@200 C/C T8@200 C/C	---
BB6	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T10@100 C/C T10@100 C/C	CANTILEVER
BB7	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T8@100 C/C T8@150 C/C	TOP & BOTTOM BARS TO BE TAKEN FROM CANTILEVER
BB10,37,50,51,61,62	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T8@150C/C T8@200C/C	---
BB12,34	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T8@100 C/C T8@150C/C	---
BB13,35	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T8@100C/C T8@100C/C	---
BB20,27	200 x 600	3 - T16 3 - T16	---	2 - T16 2 - T16	---	---	T8@200 C/C T8@200 C/C	---
BB17,24,31	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T8@100 C/C T8@100 C/C	---
BB19,26	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T10@100 C/C T10@150 C/C	---
BB21,28	200 x 600	3 - T16 3 - T16	---	2 - T16 2 - T16	---	---	T8@200C/C T8@200C/C	---
BB38	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T10@100C/C T10@100C/C	CANTILEVER
BB39	200 x 600	3 - T16 3 - T16	---	2 - T16 2 - T16	---	---	T8@100C/C T8@100C/C	TOP & BOTTOM BARS TO BE TAKEN FROM CANTILEVER
BB47,48,49	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T10@100C/C T10@150C/C	---
BB52,59,99,100	200 x 600	3 - T16 3 - T16	---	2 - T16 2 - T16	---	---	T10@150C/C T10@200C/C	---
BB69,75	200 x 400	3 - T16 3 - T16	---	2 - T16 2 - T16	---	---	T10@100C/C T10@150C/C	---
BB53,54,55,56,57,58,59,90,91,92	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T8@100C/C T8@200C/C	---
BB62A,84,85,86	200 x 350	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T8@150C/C T8@150C/C	BEAM TOP @250 SUNK LVL
BB67	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T8@150 C/C T8@150 C/C	---
BB69A,75A	200 x 375	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T8@100C/C T8@100C/C	---
BB70	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T8@100C/C T8@100C/C	CANTILEVER
BB71,72,73	200 x 600	3 - T16 3 - T16	---	3 - T16 3 - T16	---	---	T10@100C/C T10@125C/C	---
BB74	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T8@100 C/C T8@100 C/C	---
BB78,79,81	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T8@150 C/C T8@150 C/C	---
HB	200 x 600	2 - T16 2 - T16	---	2 - T16 2 - T16	---	---	T8@150C/C T8@150C/C	HIDDEN BEAM

SCHEDULE OF SLABS AT 1ST FLOOR LEVEL - SLAB S1 ARE DELETED				
SLAB MARKED	THICK.	TYPE	REINFORCEMENT	REMARKS
S2	175	TWO WAY	T10@100C/C (ALT. BENT UP)	---
S3	125	TWO WAY	T8@150C/C (ALT. BENT UP)	---
S4	125	ONE WAY	T8@150C/C (ALT. BENT UP)	250MM SUNK SLAB
S5	115	ONE WAY	T8@150C/C (ALT. BENT UP)	---
S6	115	ONE WAY	T8@150C/C (ALT. BENT UP)	---
S7	175	TWO WAY	T10@100C/C (ALT. BENT UP)	---
ST	225	ONE WAY	T10@200C/C (DIST.)	STAIRCASE SLAB

This drawing is the property of Associated Structural Engineers LLP, and shall not be reproduced or used without written permission.

DRAWING NOS. - ASC - 04
PROJECT STAGE :
☐ SUB ☐ TENDER ☐ ADVANCE ☒ EXECUTION



SIGN CONVENTIONS FOR BEAM LEFT & RIGHT SIDES FOR STIRRUPS & EXTRA TOP BARS

SPECIAL NOTES :-
1. ALL EXTERNAL WALLS SHALL BE 150 THK. LIGHT WEIGHT BLOCK.
2. ALL INTERNAL WALLS SHALL BE 150 THK. LIGHT WEIGHT BLOCK.

- NOTES :-
1. Scale reference code :- IS : 456: 2000, IS : 1893, IS : 13920
 2. Due care shall be taken to ascertain that requisite strength is provided for all structural members.
 3. Before commencement of de-shuttering, it shall comply with IS 113 of IS 456: 2000.
 4. Earthquake zone considered is zone II for MUMBAI region.
 5. Clear depth :-
 - a) Footings / Raft (Bottom / Top)
 - b) Columns & walls >200mm width
 - c) Columns & walls having width of 200mm & below
 - d) Slabs
 - e) Beams
 - f) Girders
 6. Beams having depth more than 750mm, provide side-slab reinforcement.
 7. Substructure shall be approved from our office before top of minimum clear spacing between any two longitudinal bars.
 8. All bars shall be staggered & not more than 50% bars to be staggered at any given section. - Ld = 50 x D (where D = dia. of bar)
 9. All buildings shall have tie beams/plinth beams at ground level.
 10. At any level where columns are present, tie beams shall be provided.
 11. For cantilevers, top bars to be anchored behind from edge support for -1.5 x span of cantilever.
 12. Fire rating considered - 2 Hour Max.

- Use of this drawing for construction shall explicitly confirm acceptance of the design by the client / contractor.
1. Our responsibility shall remain limited to safe and sound construction of the structure as shown in this drawing and we shall not be responsible for any structural failure during construction.
 2. Safety of any adjoining building / persons staying in building / persons and properties on adjoining roads.
 3. Safety of construction worker / any personnel at work site.
 4. Accidents occurring due to premature de-shuttering, inadequate construction material or workmanship / bad workmanship.
 5. Any accident occurring due to construction of structure designed by us.
 6. Superintending engineer shall be provided to the construction of the structure.
 7. All structural concrete should be weigh batched, machine measured and mechanically vibrated.
 8. Any discrepancy between our drawing & Architects' drawing brought to our notice before construction.
 9. Drawing shall not be scaled written dimensions are to be followed.
 10. This drawing is to read along with other relevant drawings.

REV.	DESCRIPTION	DATE	DRN.	CHKD.
10	REVISED AS MARKED	15.12.23	NK	SIDDIH
9	REVISED AS MARKED	30.11.23	NK	SIDDIH
8	REVISED AS PER COMMENTS & AS MARKED	11.23	NK	SIDDIH
7	REVISED AS PER COMMENTS & AS MARKED	10.23	NK	SIDDIH
6	REVISED AS PER COMMENTS & AS MARKED	10.23	NK	SIDDIH
5	REVISED AS PER COMMENTS & AS MARKED	10.23	NK	SIDDIH
4	REVISED AS PER COMMENTS & AS MARKED	10.23	NK	SIDDIH
3	REVISED AS PER COMMENTS & AS MARKED	10.23	NK	SIDDIH
2	REVISED AS PER COMMENTS & AS MARKED	10.23	NK	SIDDIH
1	REVISED AS PER COMMENTS & AS MARKED	10.23	NK	SIDDIH
REV.	DESCRIPTION	DATE	DRN.	CHKD.
1	GRADE OF CONCRETE :-		M25	
2	GRADE OF STEEL :-		F450	
3	ENVIRONMENTAL EXPOSURE CONDITION :-		MODERATE	
4	DESIGN LIVE LOAD :-		(UNLESS SPECIFIED)	
5	S.B.C. :-			

PROJECT : PROPOSED RESORT @ PALL, RAIGARH (GUEST BLOCK - 1A & 1B)

CLIENT : MELLORA INFRASTRUCTURE
ARCHITECT : STUDIO HUMANE

DRAWING TITLE : RCC DETAIL OF 1ST FLOOR LEVEL

SCALE	DRN.BY	CHK.BY	DATE	JOB NO.
N.T.S.	Nandamurthi	SDDH	18.09.2023	ASC-2544



Associated Structural Engineers LLP
607, Opd Square, Opp. Rattolod Lake, Barve Rd. Wagle Estate, Thane (w)- 400 004.
Phone : +91-22-2081004/05, 9976072223
Email : info@asc-engineers.com, nandamurthi@asc-engineers.com